

1-WAY ALARM & REMOTE START SYSTEM

Transmitter/Controller Operations:

LOCK/ARM & UNLOCK/DISARM: Press and hold "start" for 1 second. The system will toggle between Lock & Unlock

REMOTE START: Press "start" twice in 5 seconds
(see user feature #8 for options)



The 1-Way Transmitter

Part number: 113-03

Battery: 1 x CR2032

Frequency: 433MHz

1. START button

Technology



Feature Programming:

1. Turn the ignition key "on", then "off"
2. Within 7 seconds of step 1, press the valet switch 5 times (user features) or 10 times (installer features). This siren/horn will sound.
3. Press the valet switch the number of times equal to the feature number you wish to access.
4. Press the transmitter button that corresponds to the desired setting.
5. To change additional features, repeat steps 3-4.
6. To exit programming, turn the ignition key "on", then "off" or the system will exit automatically if there is a 10 second delay between any steps.

Tach Learning Procedure:

1. Turn the ignition key "on"
2. Within 10 seconds of step 1, press the brake pedal 5 times. The siren/horn will chirp 5 times.
3. Start the engine with the key. When tach is successfully learned, the status light will turn on solid.
4. If you need to relearn a later tach signal due to cold start/high idle, you can press the valet switch once to learn the current tach signal. The status light will turn off and back on to indicate it has relearned.

Programming Controllers/Transmitters:


1. Be sure to have all controllers/transmitters present and be sure the system is in a disarmed/unlocked state.
2. Turn the ignition key "on".
3. Within 7 seconds of step 1, press the valet switch 5 times. The siren/horn will sound.
4. Press START on one transmitter/controller until you hear a single chirp.
5. Repeat step 4 for each transmitter/controller to be programmed.
6. To exit programming, turn the ignition key "off" or the system will exit automatically if there is a 10 second delay between any steps.

Programmable Features Matrix

User Feature Programming: Ignition on, off, press valet 5 times						
# Feature	Start Button 1 time	Start button 2 times	Start button 3 times	Start button 4 times	Start Button 5 times	
CONVENIENCE	1 Remote Start Run Time	10 min	5 min	15 min	20 min	
	2 Flashing Light Confirmations	Unlock: ON RS: ON	Unlock: ON RS: Flash	Unlock: Flash RS: ON	Unlock: Flash RS: Flash	
	3 Confirmation Chirp Volume	Low	Med-Low	Med-High	High	
	4 BROWN Wire: Siren / Pulsed Horn	Pulse LOW	Pulse MED	Pulse HI	Steady Siren	
	5 Ignition Lock / Unlock	Off	Ign On = Lock	Ign. Off = Unlock	Lock + Unlock	
	6 Door Open Bypass for Feat. #5	On	Off			
	7 Unlock w/ Trunk Release	On	Off			
	8 RS Activation (Remote)	Start x 1	Start x 2	Start x 3	Start x 4	
	9 Last Door Arming	Off	On w/o Lock*	On w/ Lock*		
	10 Automatic Rearming	Off	On w/o Lock	On w/ Lock	Enhanced	
	11 Confirmation Chirps	Siren + Horn	Siren Only	On Demand	Off	
	12 Anti-Carjacking	Ignition	Door*	Ignition + Door*	Off	
Installer Feature Programming: Ignition on, off, press valet 10 times						
INSTALLER ONLY	1 RS Activation (WHITE/BLUE wire)	1 Pulse	2 pulses	3 pulses	4 pulses	
	2 PINK/WHITE Wire	Ignition	Accessory	Starter		
	3 Engine Detection	Tachless Hi	Tachless Lo	Tach Wire	Data-tach	Crank Only
	4 Gasoline or Diesel Engine	Gasoline	15 sec Diesel	20 sec Diesel	30 sec Diesel	
	5 Sat Port GREEN Wire	Dome Light	Start	Ignition	Accessory	Status
	6 Sat Port BLUE Wire	Ignition	Status	Pulse After Start below freezing	Pulse After Engine Off	Horn
	7 Crank Time	0.75 sec	1 sec	1.5 sec	2.25 sec	
	8 Door Lock/Unlock Outputs	0.8 sec	3 sec	Double Unlock	Total Closure	
	9 Remote Start Lock Control	Off	Lock after Start	Unlock before Start	Lock + Unlock	
	10 Turbo Timer	Off	1 min	2 min	3 min	
	11 Manual Transmission	On	Off			
	12 Data Port Protocol	Green: DBI Black: DBI	Green: iData Black: iData	Green: DBI Black: iData	Green: iData Black: DBI	
	13 Virtual Alarm	On	Off			
	14 Pulse Ign. on Disarm	On	Off			
	15 Lock On Prewarn	On	Off			

Grey Background = VIRTUAL ALARM (installer feature #13) Must Be ON
* Door Status Is Required On Data Ports Via External Module.

AL-260-EDP Wiring Overview Diagram

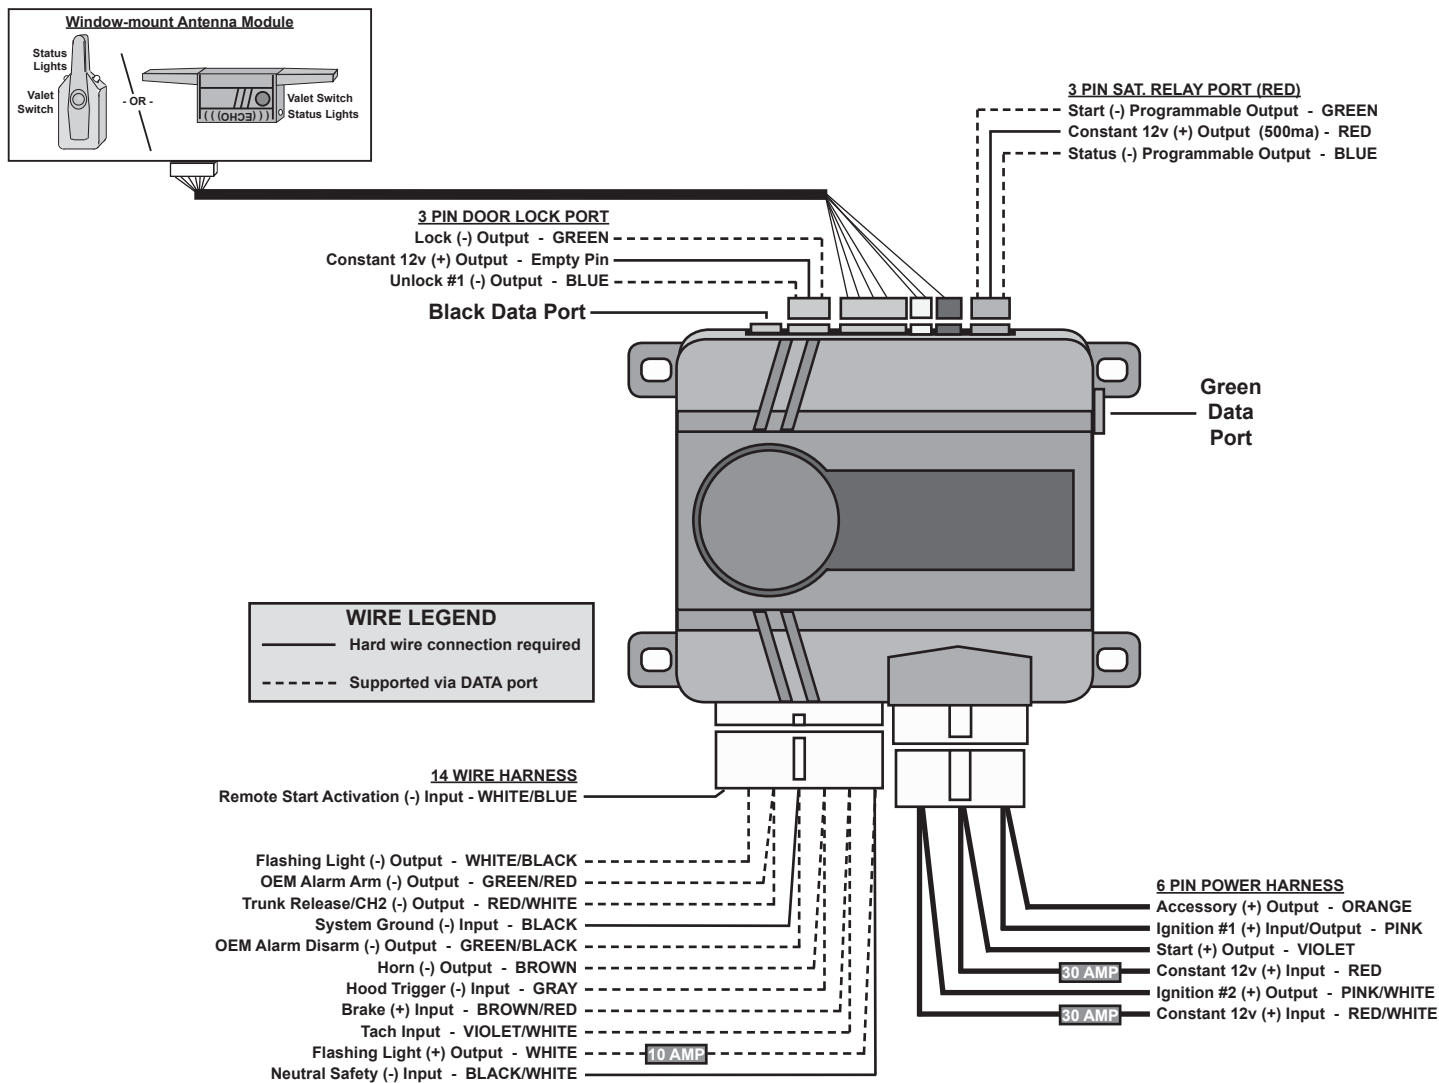

AL-260-EDP Parts List

Part Number	Description
REC-1N+	Window mount antenna module
H-RS6B	6-pin/wire main power harness
H-RS14E	14-pin/12-wire secondary harness
H-ANT-ECHO-COLOR-B	Antenna module harness
DLP-N3	3-pin/2-wire door lock/unlock harness
RS-OUTPUT	3-pin/3-wire satellite relay port harness
AU-47	Pinswitch
AU-73M	NEW mini 6-tone siren
AU-84TDP-B	Data magnetic shock sensor